

DIF U₁₀₀ci@

Revista de Difusión Científica

Vol. 2, No.2, septiembre-diciembre 2008

ISSN 2007-3585

Investigación

Estudio Global de la Columna Total de Ozono Estratosférico usando datos de TOMS

J. L. Pinedo, et al.

Tutorial

Data fusion techniques and positioning estimation for land vehicle navigation systems: an overview

D. Gingras


¡Nueva Sección y nuevo idioma!

ISSN 2007-3585



Extenso Catálogo de Productos Analógicos

High-Performance Analog >> Your Way™

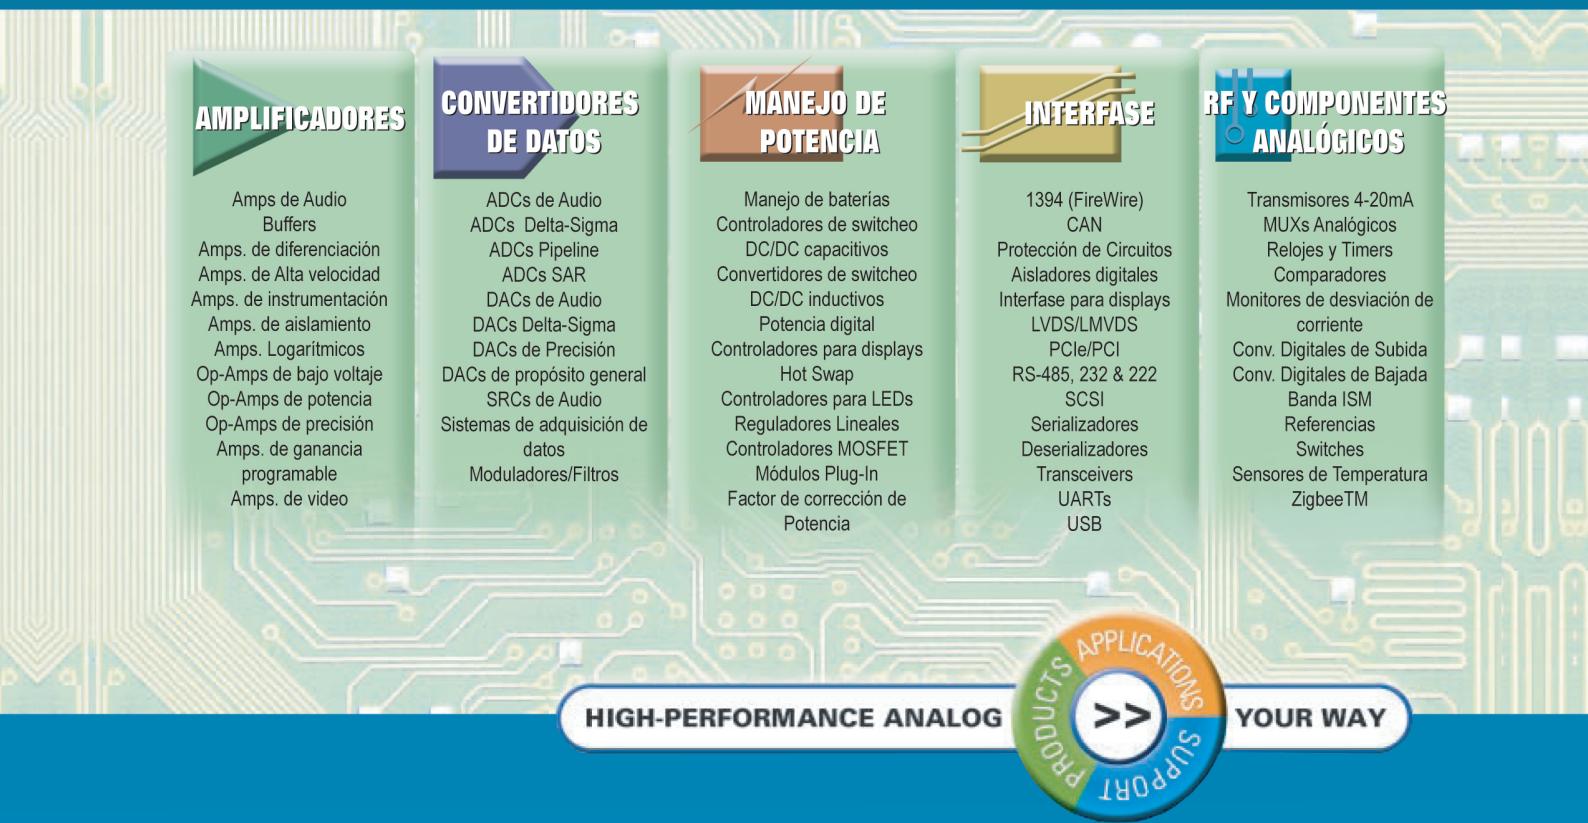

Productos avanzados que cumplen con los requerimientos de funcionamiento de tus diseños>>
Desde amplificadores y convertidores, hasta productos de interfase y potencia, TI cuenta con ICs analógicos de alto desempeño para cubrir tus necesidades.

Conocimiento de aplicaciones para hacer el proceso de tus diseños más fácil>>
Porque TI desarrolla ICs analógicos y digitales a lo largo del mundo y para una amplia gama de aplicaciones, tenemos conocimiento sobre sistemas completos y te podemos apoyar durante todo el proceso de tu diseño

Soprote técnico analógico local para tus diseños>>
La infraestructura mundial de soporte técnico analógico incluye la red de ingenieros de aplicaciones analógicas más extensa.

www.ti.com/analog

www.ti.com/espanol

Soporte Técnico: 01 800 670 75 44

HIGH-PERFORMANCE ANALOG>>YOUR WAY, Technology for innovators y el banner rojo-negro, son marcas registradas de Texas Instruments

Technology for Innovators™

 **TEXAS INSTRUMENTS**

PRODUCCIÓN
Universidad Autónoma de Zacatecas

PRODUCCIÓN Y DISEÑO

Gerardo Miramontes de León

D.R. de la Presente Edición

Gerardo Miramontes de León
Universidad Autónoma de Zacatecas
López Velarde 801, Centro
98000 Zacatecas, Zac. México

ISSN 2007-3585

DIFU100ci@ (léase difuciencia) Vol. 2, No.2, septiembre-diciembre 2008, es una publicación cuatrimestral editada por la Universidad Autónoma de Zacatecas, "Francisco García Salinas", Jardín Juárez 147, Col Centro Zacatecas, Zac. C.P. 98000. www.uaz.edu.mx/gmiram/Revista.htm. correo-e:gmiram@ieee.org. Reservas de Derechos al Uso Exclusivo del Título expedido por el INDAUTOR, Reserva: 04-2010-110314331900-102. Responsable de la última actualización Gerardo Miramontes de León, López Velarde 801, Zona Centro, Zacatecas, Zac. C.P. 98000. Fecha de última modificación 30 de mayo de 2012.

HECHO EN MÉXICO
MADE IN MEXICO

Contenido

Vol. 2, No. 2, septiembre-diciembre 2008

EDITORIAL

Nueva sección: continúa el esfuerzo

21

Contamos en este número con dos excelentes contribuciones. La primera nos presenta un tema de mucha actualidad e interés, no sólo para nuestra comunidad, sino que, seguramente, para una comunidad global. Se presenta el comportamiento de la columna total de ozono sobre Zacatecas, posteriormente las diferencias de comportamiento entre hemisferios, y particularmente entre el Ártico y la Antártica. La segunda contribución abre una nueva sección, la de los Tutoiales, la cual esperamos sea también de interés del lector, y que se incluya en cada nuevo número. Esta última trata de una visión general de los sistemas de navegación. En particular se describe el problema de la estimación en tiempo real de la posición de un vehículo para su uso en sistemas de navegación terrestre. El Prof. Gingras es desarrollador del proyecto AUTO21, un proyecto del cual surgen propuestas para los autos del futuro, los “autos inteligentes”.

Estudio Global de la Columna Total de Ozono Estratosférico usando datos de TOMS

22

por J. L. Pinedo et al. pp. 22 – 27

Los archivos diarios sobre columna de ozono, del programa de la NASA, TOMS (Total Ozone Mapping Spectrometer) entre noviembre de 1978 y mayo del 2006, fueron utilizados para evaluar la naturaleza de las variaciones interanuales de la capa de ozono en doce latitudes discretas de un grado de ancho, escogidas en forma simétricas de ambos hemisferios de la Tierra. El tratamiento de los datos, muestra las tendencias de la columna de ozono para cada una de esas latitudes escogidas. Los valores más altos de la columna de ozono estratosférico se observan en las latitudes medias y en el hemisferio norte. El comportamiento global pone en evidencia que la destrucción en la capa de ozono, depende de la latitud. Se observa también una significativa atenuación a fines de los años 90s, aunque es evidente que se trata tan sólo de una atenuación y no de una recuperación total; tal atenuación ya había sido reportada por la literatura pero para valores promedio zonales. La metodología utilizada para estudiar las tendencias globales de la capa de ozono, usando bandas estrechas de latitud, resulta ser original y particularmente útil tanto para realizar evaluaciones cuantitativas como para fines académicos.

INVESTIGACIÓN

TUTORIAL

Data fusion techniques and positioning estimation for land vehicle navigation systems: an overview

28

por Denis Gingras, Dr. Ing pp. 28 – 45

En este artículo, se describe el problema de la estimación en tiempo real de la posición de un vehículo para su uso en sistemas de navegación terrestre. Después de describir el contexto de la aplicación y dar una definición del problema, se revisa el marco matemático y las tecnologías involucradas para diseñar los sistemas de posicionamiento. Se compara el desempeño de los enfoques de fusión de datos más populares y se da una vista a sus limitaciones y capacidades. Después se revisa el caso de la robustez de los sistemas de posicionamiento cuando uno o más sensores están defectuosos. Se describe cómo el sistema de posicionamiento puede hacerse más robusto y adaptable, para tomar en cuenta la ocurrencia de falla de sensores. Finalmente, se va un paso más allá y se exploran las posibles arquitecturas de los sistemas de posicionamiento colaborativos, donde varios vehículos interactúan intercambiando datos para mejorar la estimación de su propia localización. Se cierra el artículo con algunas conclusiones sobre la futura evolución de este campo.

Nueva sección: continúa el esfuerzo

NACE una nueva sección, gracias a la contribución del Dr. Denis Gingras de la Universidad de Sherbrooke, de Quebec Canadá. La sección de Tutoriales, la cual esperamos sea bienvenida; pero además hay que destacar que se publica al mismo tiempo, el primer trabajo en el idioma Inglés. Son pues dos nuevos aspectos que se presentan en este número. Aunque sólo se incluyen dos trabajos, estos son de una excelente calidad por su contenido, su extensión, y su importancia.

Sería deseable que la sección editorial incluyera algún tema de fondo. Esa no ha sido la costumbre y además tenemos enfrente el reto de continuar con este esfuerzo de divulgación de temas de ciencia y tecnología. Cabe señalar que desde el punto de vista de las áreas tecnológicas, en las que se dividen nuestros espacios académicos, ciencia y tecnología deben ir de la mano. El Dr. José Luis Pinedo, en una ocasión preguntaba a sus alumnos de ingeniería si consideraban que un ingeniero era un científico^a. Su pregunta en realidad es un tema que debiera discutirse a fondo, pues la ingeniería es en sí una ciencia, y el ingeniero debe por lo tanto hacer ciencia. Habrá quien no esté de acuerdo, sin embargo hay Estados en los que sí se ha entendido así, y apoyan el desarrollo de “Centros de Investigación en Desarrollo Tecnológico”. En fin, si todo sale bien, se podrá abrir el tema a discusión y con suerte habrá más desarrollo tecnológico propio y más ingeniería.

Para terminar, deseo agradecer la excelente contribución del grupo de investigadores del Centro Regional de Estudios Nucleares. Esta contribución nos honra de manera que nos anima a continuar con la edición de esta revista.

© diciembre 2008 G. Miramontes

correo-e: gmiram2002@yahoo.com

^a dato obtenido de una plática personal con él.

DIFU100ci@ (léase difucuencia) es una publicación cuatrimestral editada por la Universidad Autónoma de Zacatecas, Jardín Juárez 147, Col Centro Zacatecas, Zac. Tiene como objetivo difundir conocimientos científicos y tecnológicos del área de la ingeniería, a través de artículos de divulgación y artículos que muestren temas de investigación.

EDITOR EN JEFE

Gerardo Miramontes de León
U. Autónoma de Zacatecas

CONSEJO EDITORIAL

Leonardo Acho Zuppa
U Politécnica de Catalunya
España

Miguel Ándres
U. de Valencia, España

Pedro Ándres
U. de Valencia, España

Luis Tupak Aguilar
CITEDI-IPN, México

David H. Covarrubias Rosales
CICESE, México

Ernesto García Domínguez
U. Autónoma de Zacatecas

Mireya Sara García Vázquez
CITEDI-IPN, México

Luis García Santander
U. de Concepción, Chile

Geminiano D. Martínez Ponce
CIO, México

Lyle E. McBride
CSU, Chico USA

Oscar Montiel
CITEDI-IPN, México

Claudia Sifuentes Gallardo
U. Autónoma de Zacatecas

El contenido de los artículos es responsabilidad exclusiva de los autores. Se permite la reproducción total o parcial de los contenidos siempre y cuando se cite la fuente, y en los términos de la Ley Federal de Derechos de Autor y, en su caso, de los tratados internacionales aplicables.

Estudio Global de la Columna Total de Ozono Estratosférico usando datos de TOMS

José Luis Pinedo Vega, Carlos Ríos Martínez, Analeni Presbítero Perales, Leopoldo Quirino Torres†, Fernando Mireles García y José Ignacio Dávila Rangel

Global Study of Stratospheric Ozone Total Column using data from TOMS

Recibido: septiembre 10, 2008

Aceptado: octubre 15, 2008

Palabras clave: Capa de Ozono; datos TOMS; radiación UV

Abstract:

Daily records on a column of ozone, from the NASA program, TOMS (Total Ozone Mapping Spectrometer) between November 1978 and May 2006 were used to assess the nature of the interannual variations of the ozone layer in twelve discrete latitudes a degree wide, symmetrical shape chosen in both hemispheres of the Earth. Treatment of the data shows the trends of the ozone column for each of these selected latitudes. Higher values of stratospheric ozone column observed in the midlatitudes and in the northern hemisphere. The overall performance shows that the destruction of ozone layer depends on the latitude. There is also a significant attenuation in the late 1990's, although it is clear that this is only an attenuation rather than a full recovery,

such attenuation had already been reported in the literature but for zonal mean values. The methodology used to study global trends of the ozone layer, using narrow bands of latitude, be original and is particularly useful for quantitative assessments to academic purposes.

Keywords: Ozone layer; TOMS data; UV radiation

LA línea de investigación Espectroradiometría Solar inició en febrero del 2000 en el Centro Regional de Estudios Nucleares (CREN) de la UAZ, con financiamiento obtenido tras la convocatoria del Consejo Nacional de Ciencia y Tecnología (CONACyT) a proyectos de investigación del año 2000, así como también con los recursos del programa de repatriación asignados al responsable del proyecto. Ambos financiamientos permitieron equipar un laboratorio de espectroradiometría ultravioleta (UV) y visible, que comprende:

- un espectroradiómetro medidor de radiación que permite la obtención de espectros, con una resolución del orden 0.5 nm o menos,

- una estación meteorológica que permite medir: temperatura, presión, y humedad relativa ambiental así como la velocidad y dirección del viento,
- dos Pyranómetros, uno para Radiación Global Total (290-1600 nm) y otro para Radiación UV (290-400 nm)
- un banco óptico y lámparas de referencia.

La línea de investigación espectroradiometría solar tienen carácter teórico experimental, involucra mediciones, cálculos teóricos, cálculos numéricos, y su interpretación física.

Las mediciones de los primeros espectros de radiación UV solar en Zacatecas permitieron corroborar que los niveles de ozono en Zacatecas son elevados. Repitiendo esas mediciones a lo largo del año se pudo observar, que contrariamente a lo que se podía esperar, la radiación UV en invierno es mayor que en verano. Como la radiación total es más intensa en verano era de esperarse que la radiación UV también; pero encontramos que ocurría lo inverso. Estos resultados fueron publicados en la revista Geofísica Internacional [1].

Contrariamente a lo que se podía esperar, la radiación UV en invierno es mayor que en verano.

Hipótesis

¿Por qué los niveles de radiación UV sobre Zacatecas son significativamente más elevados en invierno que en verano? La hipótesis a priori fue, que debía existir una dependencia directa entre los niveles de radiación UV y el espesor de la capa de ozono estratosférico situado sobre Zacatecas. Para demostrar esta hipótesis, era necesario conocer los niveles de la capa de ozono sobre Zacatecas a lo largo del año.

a 2.69×10^{16} moléculas por cm^2 lo cual es equivalente a la cantidad moléculas de O_3 sobre cada 1 cm^2 de superficie terrestre. El promedio global de la columna de ozono es de 300 DU, las cuales podrían ser equivalentes a una capa de 3 mm de grueso si se aislara el ozono.

Para conocer, los valores de la capa de ozono sobre Zacatecas, se pudo haber optado por medirlos, cosa que implicaba: gestión de financiamiento para compra de equipo, y en caso de éxito, asimilación de la técnica de medición, tiempo, etc.. Esta opción, indudablemente era atractiva en términos de asimilación y adquisición de infraestructura, sin embargo tiene la limitante de que no se pueden hacer estudios retrospectivos. Recurrimos entonces a los datos de TOMS (Total Ozone Mapping Spectrometer) programa de la NASA, lanzado en noviembre de 1978, que día con día mide la columna de ozono sobre toda la Tierra mediante un sistema radiométrico montado en un satélite.

TOMS publica los datos sobre la columna total de ozono estratosférico, en dos versiones, una como imagen y otra como archivo de datos numéricos. Las imágenes (Figura 1), aunque dan una idea visual extraordinaria, no ofrecen una información cuantitativa en cuanto a tendencias o comportamiento a largo plazo. Hubo entonces que analizar la forma de los archivos de datos, para tratar de utilizarlos para evaluación del comportamiento a lo largo del año sobre Zacatecas.

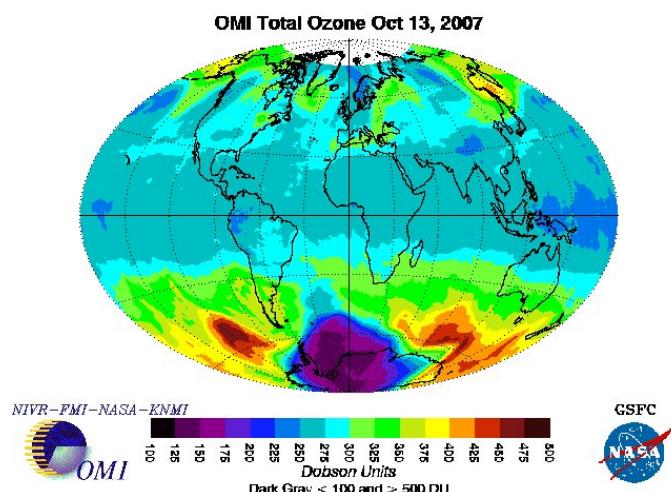


Figura 1. Imagen típica de la columna total de ozono estratosférico obtenida por el programa TOMS (Total Ozone Mapping Stratospheric), de la NASA [3].

DATOS SOBRE LA COLUMNA TOTAL DE OZONO ESTRATOSFÉRICO

La columna total de ozono estratosférico se reporta en Unidades Dobson (DU). Una Unidad Dobson corresponde

COMPORTAMIENTO DE LA CAPA DE OZONO ESTRATOSFÉRICO SOBRE ZACATECAS

Los datos de la columna de ozono correspondiente a cada día sobre Zacatecas pudieron localizarse fácilmente en el archivo del dia. Pero no resultaba nada práctico leerlo en forma manual, dada la extensión de cada archivo. Los archivos diarios de TOMS contienen un dato o valor de la columna de ozono para cada área rectangular sobre la superficie de la Tierra, de 1.25 grados de longitud por 1 grados de latitud. Para cada grado de latitud hay 288 mediciones. Un archivo contiene en total 2160 líneas, y requiere 38 hojas tamaño carta para ser impreso.

Los archivos diarios de TOMS contienen un dato o valor de la columna de ozono para cada área rectangular sobre la superficie de la Tierra.

Para obtener en forma automática el valor de la columna de ozono para cada día sobre Zacatecas, fue necesario escribir un programa que leyera el dato de cada día y que lo registrara en forma acumulativa en otro archivo; de esta manera pudieron obtenerse las primeras secuencias en el comportamiento para todo un año y posteriormente para varios años.

La gráfica de los datos extraídos mostró que el nivel de la capa de ozono sobre Zacatecas oscila anualmente en forma estacionaria, observándose los valores más bajos en invierno. Con esto quedaba resuelta la pregunta sobre ¿por qué la radiación UV es mayor en invierno? La respuesta es: porque la capa de ozono que protege la superficie de la Tierra es de menor concentración en esta época del año.

El comportamiento de la columna total de ozono de tres años (2002-2005) fue presentado por Analeni Presbítero Perales en su tesis de licenciatura (Figura 2). Para estos tres años, se encontró, entre otras cosas, que los niveles más bajos se observaron en el invierno del 2004, año en que el invierno fue el más severo de los tres [4].

Surgían entonces un par de preguntas interrelacionadas ¿el comportamiento estacionario en el espesor de la capa de

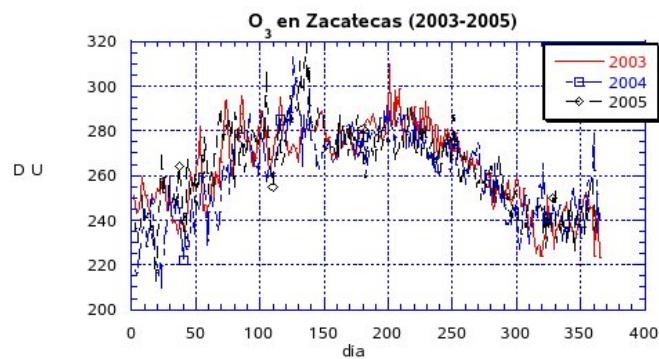


Figura 2. Comportamiento de la capa de ozono sobre Zacatecas entre 2003 y 2005, de acuerdo a TOMS [4].

ozono ha sido el mismo a lo largo del tiempo, o se ha modificado como lo ocurrido con el hueco de la capa de ozono sobre la Antártida? Y en caso de que haya disminuido ¿la radiación UV sobre Zacatecas ha aumentando en los últimos años?

En afán de responder, hubo que repetir el estudio en forma retrospectiva hasta el inicio de las mediciones de TOMS (noviembre de 1978).

El análisis de los datos relativos a la columna de ozono a Zacatecas puso en evidencia que las oscilaciones han sido prácticamente similares, aunque puede observarse una ligera pero paulatina disminución, a lo largo de los 29 años de mediciones satelitales. Hay que remarcar, que aunque existe esa disminución, es apenas significativa y dista mucho de ser del orden de la de la Antártida. Entre 1979 y 1995 en la Antártida, la perdida en la capa de ozono fue del orden de 1.34%, en el Trópico de Cáncer fue tan solo de 0.17% .

Aunque a priori podría asumirse que esa ligera disminución no puede ser importante, puesto que no tiene relevancia estadística, es innegable que el eventual impacto en los niveles de radiación UV amerita ser estudiado con mayor precisión en posteriores estudios.

Puede suponerse que en Zacatecas, los niveles de radiación UV son elevados justamente por su ubicación geográfica, vecina al trópico de Cáncer y a una altura sobre el nivel del mar considerable (2450 m). Sin embargo, subyacía una segunda interrogante ¿Por qué entonces existe un aparente aumento en la incidencia de cáncer en la piel en Zacatecas? Si la radiación UV no ha aumentado entonces el aumento en la incidencia en el cáncer debe tener su explicación en

el aumento en la esperanza de vida de la población y en el cambio de hábitos: puesto que ya no se usa sombrero, ni manga larga y las exposiciones al sol son más frecuentes [7].

ANALISIS GLOBALES SOBRE EL COMPORTAMIENTO DE LA CAPA DE OZONO

Una vez acumulado un gran número de archivos con datos de ozono de toda la Tierra, nos propusimos abordar una siguiente interrogante ¿el comportamiento local es similar al de toda la latitud? Para estudiar el problema, con la misma metodología analizamos el trópico de Cáncer. La respuesta fue, aunque existe una dispersión importante en los valores de la columna de ozono, se conservan las oscilaciones estacionarias tanto en los valores promedio de toda la latitud como en los mínimos y máximos (Figura 3, Figura 4).

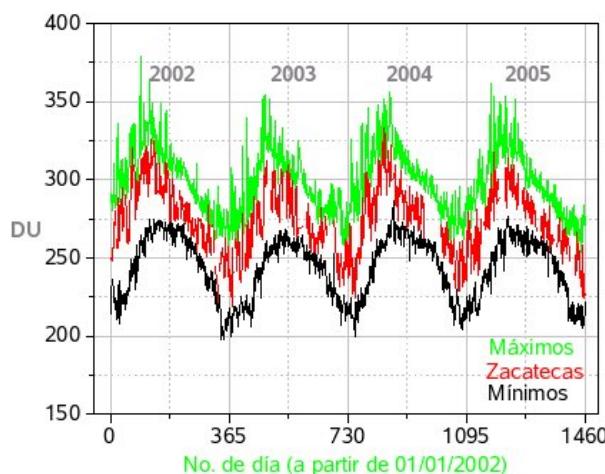


Figura 3. Columna Total de Ozono entre 2002 y 2005: valores máximos (verde) y mínimos (negro) sobre el Trópico de Cáncer, y valores sobre Zacatecas (rojo).

En seguida, sabiendo que el comportamiento del ozono estratosférico es característico de cada latitud, nos propusimos comparar el comportamiento del hemisferio norte con lo que ocurre en el hemisferio sur. Para ello sólo había que agregar algoritmos o subrutinas al programa que permitió el estudio local sobre Zacatecas, para estudiar otras latitudes.

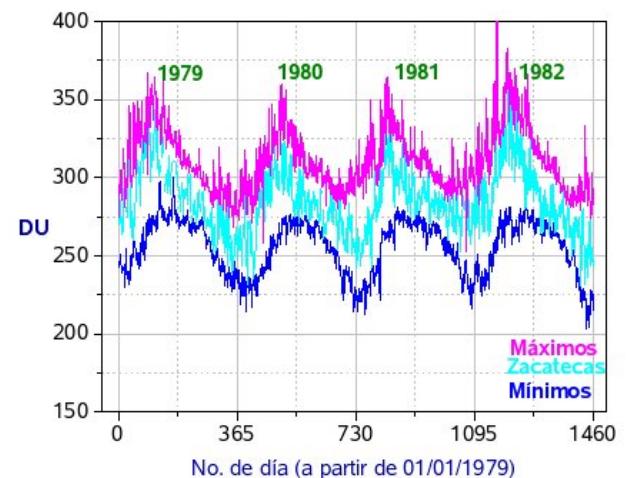


Figura 4. Columna Total de Ozono entre 1979 y 1982: valores máximos (magenta) y mínimos (azul) sobre el Trópico de Cáncer, y valores sobre Zacatecas (azul cielo).

Seleccionamos 12 latitudes: el Ecuador, los trópicos, 45 grados, 65 grados, 75 grados y los polos.

Esta selección permitió mostrar el potencial que representan los archivos de TOMS para estudiar el comportamiento en la capa de ozono a diferentes latitudes.

Así, en la Figura 5 se presenta el comportamiento del ozono estratosférico a 74.5 grados S en la Antártida; mientras que en la Figura 6 se presenta el comportamiento a 74.5 grados N en el Ártico. En ambas gráficas la línea punteada azul da cuenta de la disminución en la capa de ozono.¹

Se puede observar, que los niveles de la columna de ozono en el Ártico han sido mucho mayores que los de la Antártida. Mientras que en la Antártida el promedio anual en 1978 era del orden de 320 unidades Dobson (DU) en el Ártico eran del orden de 400 DU.

Se puede también observar que ha habido una reducción en la capa de ozono en ambos casquetes polares. Sin embargo es evidente un agotamiento muy severo en la Antártida, mientras que en el Ártico es tan sólo significativo. Entre 1978 y 1986 en la Antártida, los valores promedio anuales más bajos descendieron de 330 a 250 DU, es decir 80 DU;

¹ Nota: Las discontinuidades corresponden a las noches polares pues el método de medición se basa en la reflexión de la radiación solar desde el suelo.

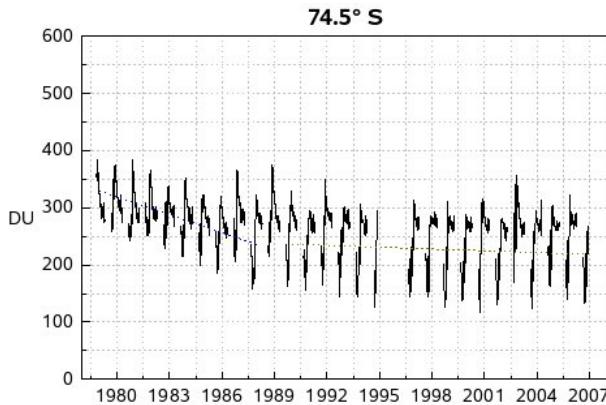


Figura 5. Espesor de la capa de ozono a 74.5 S entre 1978 y 2007.

mientras que en el Ártico en el mismo periodo la disminución fue del orden de 30 DU.

Ciertamente el promedio no habla de la severidad de la destrucción de la capa de ozono en la Antártida. Sin embargo, si se observan los valores mínimos se dará cuenta que de ser del 250 DU en 1978 disminuyeron a 150 en 1986. Posteriormente los valores continuaron bajando aunque con un ritmo menos severo.

Ciertamente el ritmo en la de disminución de la capa de ozono se ha reducido de manera importante a partir de 1995. Este es un hecho sin duda relevante, sin embargo de ninguna manera puede interpretarse que el agotamiento del ozono se haya revertido; simplemente el ritmo de diminución se ha atenuado; baste verificar que los valores mínimos en la Antártida varían alrededor de 150 y no se han vuelto a tener niveles de 250 como en 1978.

Estas conclusiones son similares a las reportadas por la World Meteorological Organization [5,6]. La diferencia entre este trabajo y los trabajos en los que se apoya la WMO radican en que ellos han llegado a sus conclusiones utilizando valores promedio zonales o bandas anchas de latitud. A diferencia, en este estudio hemos utilizado valores correspondientes a bandas discretas de ancho igual a 1° de latitud. Esta es una forma más fina de conducir el análisis que tiene la ventaja de permitir dar relevancia a las particularidades en el comportamiento de la capa de ozono a diferentes latitudes.

Al analizar las oscilaciones en la capa de ozono en dife-

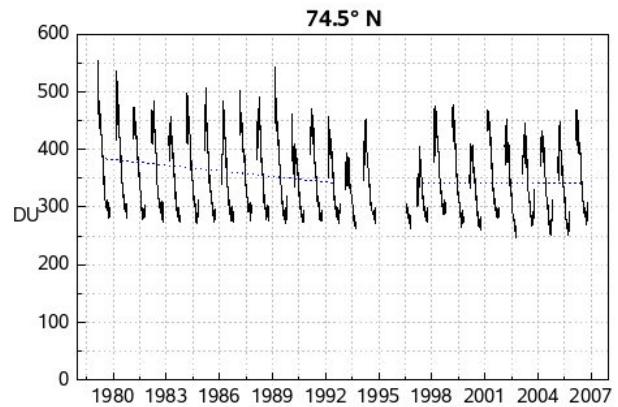


Figura 6. Espesor de la capa de ozono a 74.5 N entre 1978 y 2007.

entes latitudes, descubrimos una perturbación en el comportamiento estacionario en la latitud 59.5 grados S. Ésta aparece en 1986 y se acentúa y se vuelve sistemática en 1994 (Figura 7).

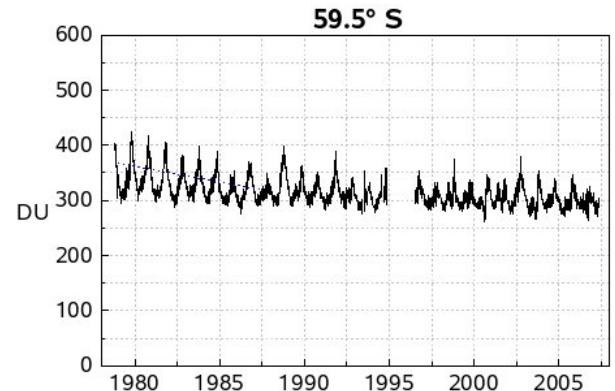


Figura 7. Comportamiento de la capa de ozono a 59.5 S entre 1978 y 2007.

Puede observarse en la Figura 7, cómo la periodicidad comienza a modificarse en 1986, lo que se manifiesta primero en un cambio de amplitud en las variaciones estacionarias que posteriormente se convierten en perturbaciones sucesivas en la periodicidad.

Interpretamos que este comportamiento es resultado de una especie de efecto de oleaje del hueco de la capa de ozono; el cual gira con una velocidad que es posible determinar. Este efecto no ha sido reportado como tal, seguramente porque los estudios sobre tendencias han recurrido a valores promedio zonales, que representan bandas de un ancho de 20 y 35 grados de latitud; lo que explica una perdida de precisión. El probable impacto de éste efecto de oleaje sobre el transporte de ozono está fuera del alcance de este trabajo; sin embargo parece evidente que se trata de un efecto irreversible en los mecanismos de transporte del ozono en la estratosfera.

CONCLUSIONES

Los datos de TOMS versión 8, de Noviembre 1978 a junio del 2007, fueron utilizados para analizar las variaciones interanuales en diversas bandas de un grado de latitud.

El comportamiento en la distribución confirma los niveles de agotamiento de la capa de ozono así como también pone en evidencia la atenuación en la disminución. El método de análisis permitió poner en evidencia el efecto de oleaje del hueco de la capa de ozono, a nivel de la latitud 59.5 grados S. Este efecto sugiere que independientemente de que el ritmo de destrucción de la capa de ozono haya disminuido, hay signos de irreversibilidad en el comportamiento de la capa de ozono estratosférico.

Bibliografía

- [1] J. L. Pinedo V., F. Mireles G., C. Ríos M., L. L. Quirino T., J. I. Dávila R., Spectral Signatura Of Ultraviolet Solar Irradiance In Zacatecas, Geofísica Internacional, Vol. 45, No 4, (2006), p. p. 263-269.
- [2] Earth Probe TOMS Data an Image Archive, http://toms.gsfc.nasa.gov/ozone/today_v8.html
- [3] ftp://toms.gsfc.nasa.gov/pub/omi/images/global/Y2007/IM_ozgb1_omi_20071013.png, (On line: 16,10,2007)
- [4] Presbítero Perales Analeni, Caracterización del espesor de la capa de ozono en Zacatecas del 2003 al 2005, Tesis Licenciatura en Químico Farmacéutico Biólogo, (abr/2006).

- [5] WMO/UNEP (2003), Global Ozone Research and Monitoring Project, Scientific Assessment of Ozone Depletion: 2002, Rep. 47.
- [6] WMO/UNEP (2007), Assessment of Stratospheric Ozone Depletion: 2006.
- [7] Castañeda López Rosalba, Radiación ultravioleta en la incidencia de cáncer de la piel en el estado de Zacatecas, México (1998-2007), Tesis de Maestría en Ciencias Nucleares, (sep/2008).

Acerca del autor o autores

José Luis Pinedo Vega, Carlos Ríos Martínez, Analeni Presbítero Perales, Leopoldo Quirino Torres†, Fernando Mireles García y José Ignacio Dávila Rangel son investigadores de la Unidad Académica de Estudios Nucleares de la Universidad Autónoma de Zacatecas, Ciprés S/N, Frac. La Peñuela, Zacatecas, Zac., c. p. 98000 México, Tel. (492) 9 22 70 43, ext 107, correo-e:jlpinedo@uaz.edu.mx.

Data fusion techniques and positioning estimation for land vehicle navigation systems: an overview

Denis Gingras, Dr. Ing

Técnicas de fusión de datos y estimación de posición para sistemas de navegación terrestre: un repaso

Recibido: septiembre 12, 2008

Aceptado: octubre 17, 2008

Palabras clave: Fusión de datos; estimación de posición; sistemas de navegación

Abstract:

This article describes the problem of real-time estimate of the position of a vehicle for use in terrestrial navigation systems. After describing the context of the application and give a definition of the problem, we review the mathematical framework and the technologies involved in designing positioning systems. We compare the performance of more popular data fusion approaches and give a view of their limitations and capabilities. Then check for the robustness of the positioning systems when one or more sensors are defective. It describes how the positioning system can be made more robust and adaptable, taking into account the occurrence of failure of sensors. Finally, it goes a step further and explores the possible architectures for collaborative positioning systems, where multiple vehicles interact by exchanging data to improve the estimate of its own location. The article

finishes with some conclusions about future developments in this field.

Keywords: Data fusion; position estimation; navigation systems

AN integrated navigation information system is an embedded system installed in a vehicle, which provides useful functionalities to the driver like path planning, guidance, digital map and points of interest directory [1]. The guidance module uses a planned trip to indicate the driver which route to take. To avoid giving wrong indications and impair driving safety, the navigation system relies upon a positioning module to know precisely and continuously the localization of the vehicle.

The required performance of the positioning module is achieved by using a cluster of heterogeneous sensors whose measurements are fused. The sensors commonly found in those systems are differential odometer, global positioning system (GPS) and 2 or 3 axis inertial measurement unit respectively. Two or more of these complementary positioning sensing methods must be integrated together to achieve the required performance at low cost. The integration, which implies the fusion of noisy data provided by

each sensor, must be performed in some optimal manner. Most positioning system designers choose the Kalman filter as the data fusion method. In particular, one uses the the extended Kalman filter. The extended Kalman filter is a variation of the Kalman filter used to cope with nonlinearities of the sensors. Recently, an improvement to the extended Kalman filter has been proposed, the unscented Kalman filter [2]. An other interesting alternative to using Kalman filters is the use of artificial neural network (NN) [3]. In the following section, we will look at those various data fusion approaches and discuss their respective performances.

Next we will look at the robustness required for a real time positioning system. In positioning navigation systems, at any time, any of the sensors can break down or stop sending information, temporarily or permanently. To ensure a practical solution for use in guidance and navigation systems, faulty sensors must be detected and isolated such that their erroneous data will not corrupt the global position estimates. As we just mentioned, Kalman filter is usually popular for data fusion applications. However, an interesting idea is to use it for fault detection architecture as well. In this section, we will evaluate the potential of combining fault detection and data fusion into a single architecture to make a robust positioning navigation system [4].

So far, single vehicle positioning systems have been discussed. In a subsequent section, we will consider the possibility to achieve a distributed collaborative architecture. Proliferation of real time inter-vehicular communications provides new sources of exploitable positioning data. Vehicles can, under numerous situations, have GPS satellite shortages but there will always be vehicles in their vicinity, viewing different GPS satellites line of sights (LOS), to provide them with useful navigation information. We will thus look at a cooperative positioning technique making use of reliable positions of some vehicles to enhance positioning estimates of some others [5]. The approach exploits inter-vehicle data flow to extract good position measurements from vehicles with good GPS satellite LOS, in order to enhance low positioning accuracy of other vehicles, in the neighborhood. The integration of such information is done using geometric data fusion approach.

CONTEXT AND PROBLEM STATEMENT

The principal function of a land navigation system in a vehicle is to guide the driver while minimizing the trip duration and/or the traveled distance. Modern navigation applications require position estimates with a precision of 1 meters or less and at a frequency of 1 Hertz or more. A differential GPS receiver alone could in principle estimate the position with the required performance. It is still too expensive however for automotive applications and the fixed references are not always available. On the other hand, a low cost GPS receiver cannot always achieve the required precision. Furthermore, GPS alone based systems suffer from frequent occlusions of satellite signals by high buildings or heavy foliages, which often prevent computation of a solution by a GPS receiver for several seconds. For all these reasons, a cluster of various sensors, including a GPS receiver, is usually used [6]. Two other popular sensors are the differential odometer and the inertial measurement unit (IMU) [7]. A differential odometer measures the distance traveled by a vehicle and the current azimuth during a sampling period. An inertial measurement unit (IMU) measures the vehicle's inertia characterized by it's acceleration and it's angular velocity. An IMU measures the acceleration and the angular velocity along the axis of a Cartesian coordinate system. With these two sensors, the position of the vehicle is reckoned by applying basic kinematics equations and using an initial position obtained from another information source. By means of integration, the traveled distance and the azimuth variation can be computed and therefore a new position can be computed with these measurements and the last known position by dead reckoning. The estimated position will eventually drift from the real position because of the accumulation of errors. Indeed, the recursive nature of the positioning computation with the IMU causes the positioning error to grow proportionally with time. A periodic reset is needed. A trivial way to fuse the data from these two sensors is therefore to reset periodically the IMU position estimate with an absolute position estimate from the GPS.

Modern navigation applications require position estimates with a precision of 1 meters or less and at a frequency of 1 Hertz or more.

A more complex fusion method than the reckon/reset positioning system described above is required to improve the precision of the estimation. These methods fuse continuously the available measurements in some optimal sense, as depicted in Figure 1 in a centralized architecture.

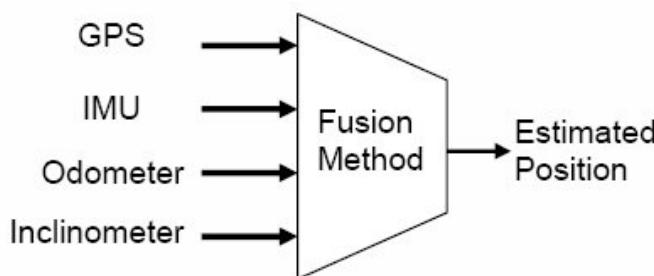


Figura 1. Centralized fusion.

The sensor's measurements are distorted by deterministic and random errors. Those sources of random errors are usually described using stochastic models in a statistical framework. The estimate ideally maximizes the a posteriori probability of the random variable position, resulting from the mathematical transformation of the stochastic processes, which model the sensors imperfect measurements. The fusion method then defines the mathematical transformation. As we will see later on, the most popular method is the Kalman filter [8]. The Kalman filter is an optimal linear estimator, which uses the a priori information on the sensor noises, the vehicle dynamic and the kinematics equations to compute recursively an optimal position, which minimizes the mean square error [9], [10].

SENSORS MODELS

In a positioning navigation system, various sensors are used. Generally speaking, a sensor is a device that responds to or detects a physical quantity and transmits the resulting signal to a controller. Position sensors can be designed to detect

Sensor	Output	Relation to position
GPS	Rover position	Directly output position coordinates
IMU	Accelerations and angular rate	Outputs can be integrated by an INS to obtain the vehicle position
Odometer	Distance or increment of distance	Position coordinates are determined by dead reckoning from the distance and direction relative to a known location
Inclinometer	Inclination	
Magnetic compass	Azimuth	

Tabla 1. Relationship of vehicle position and sensor outputs.

various parameters (coordinate, distance, direction, or angular velocity) of the position of vehicular mechanical systems. Sensors can provide absolute or relative navigation information. GPS and magnetic compass provide absolute position and angular direction (azimuth) respectively, whereas all other sensors provide relative navigation information using dead reckoning. Detailed relationships between the position and typical sensors are shown in Table 1.

GPS MODEL

The GPS model can be described by equation (1) [1].

$$\hat{\delta}[t] = \delta[t] + \delta_{trop}[t] + \delta_{iono}[t] + \delta_{mult}[t], \quad (1)$$

where $\hat{\delta}[t]$ is the pseudorange measured by the emulated receiver, $\delta[t]$ is the real pseudorange, $\delta_{trop}[t]$ is the tropospheric delay, $\delta_{iono}[t]$ is the ionospheric delay, $\delta_{white}[t]$ is the white noise generated by the receiver's electronic components and $\delta_{mult}[t]$ is the multipath problem.

IMU MODEL

The 3-axis inertial measurement unit has a single model for every gyroscope and accelerometer described by equation (2), [6].

DATA FUSION USING KALMAN FILTER

$$\begin{aligned} \hat{d}_i[t] = & d_i[t] + s_i(d_i[t] + d_j[t] \sin(\delta_{ij}) \\ & + d_k[t] \sin(\delta_{ik})) + b_i[0] + \sum_{n=1}^t w_{bi}[n] \\ & + d_j[t] \sin(\delta_{ij}) + d_k[t] \sin(\delta_{ik}) \\ & + c_i(d_i[t] + d_j[t] \sin(\delta_{ij}) \\ & + d_k[t] \sin(\delta_{ik}))^2 + w_i[t], \end{aligned} \quad (2)$$

where $\hat{d}_i[t]$ is the measurement, $d_i[t]$ is the real value, s_i is the scale factor error, $d_j[t]$ is the real value relative to the axis j , $d_k[t]$ is the real value relative to the axis k , δ_{ij} is the misalignment angle between the axis i and j , δ_{ik} is the misalignment angle between the axis i and k , $b_i[0]$ is the turn-on bias, $w_{bi}[n]$ is the random walk white noise characterizing the bias drift, c_i is the non-linear scale factor and $w_i[t]$ is the additive white noise component. The scale factor error, the bias parameters, the non-linear scale factor and the additive white noise component have different value depending on the sensor type.

DIFFERENTIAL ODOMETER MODEL

A differential odometer is constituted of two sensors measuring the number of rotation of each wheel situated on the same axle. The total traveled distance and the azimuth of the vehicle can be computed with the equation (3) and (4) respectively.

$$\begin{aligned} \hat{d}[t] = & \hat{d}[t-1] \\ & + \frac{(1+v_d v[t]+s_d)}{2} c_d[t]+r[t] \\ & + \frac{(1+v_g v[t]+s_g)}{2} c_g[t]+r[t] \end{aligned} \quad (3)$$

$$\begin{aligned} \hat{\theta}[t] = & \hat{\theta}[t-1] \\ & + \frac{(1+v_g v[t]+s_g)}{l} c_g[t]+r[t] \\ & - \frac{(1+v_d v[t]+s_d)}{l} c_d[t]+r[t], \end{aligned} \quad (4)$$

where $\hat{d}[t]$ is the total traveled distance at time t , $\hat{d}[t-1]$ is the total traveled distance at time $t-1$, $v[t]$ is the car's velocity, v_d and v_g are the gains characterizing the tire dilatation, s_d and s_g are the scale factors for the right and the left wheel respectively, $c_d[t]$ and $c_g[t]$ are the numbers of rotations measured within the interval $[t-1, t]$ for the right and left wheel respectively, $r[t]$ is a uniform random variable describing the resolution error, $\hat{\theta}[t]$ is the azimuth estimated at time t , $\hat{\theta}[t-1]$ is the azimuth estimated at time $[t-1]$ and l is the axle length.

The architecture of a positioning system can be decentralized or centralized. In the centralized architecture, all the sensor measurements are fused by one fusion method only. So it is easy to compare the performance of two different fusion methods when the cluster of sensors is the same. The Kalman filter is an optimal linear estimator introduced in 1960 [8]. The filter is optimal when the process noise and the measurement noise can be modelized by white Gaussian noise. However, it behaves poorly in the presence of nonlinearities. Improvement can be achieved with the extended Kalman filter (EKF) [10], [11]. This filter is based upon the principle of linearizing the state transition matrix and the observation matrix with Taylor series expansions. The extended Kalman filter has been very popular for land navigation system [7, 25, 26]. The equations of a centralized data fusion architecture based on an extended Kalman filter for land navigation positioning system are described in [7]. As expected, the linearization can lead to poor performance and divergence of the filter for highly non-linear problems. In addition, the performance analysis of the extended Kalman filter presents some difficulties due to the recurrence of the measure sequence into the states of the filter [6]. Finally, implementation of the extended filter can be quite laborious depending on the number of states required to model the system. For all these reasons, a recent improvement to the EKF, named the “unscented” Kalman filter (UKF) has been proposed [14]. The UKF approximates the probability density resulting from the non-linear transformation of a random variable instead of approximating the nonlinear functions with a Taylor series expansion. The approximation is done by evaluating the nonlinear function with a minimal set of carefully chosen sample points. The posterior mean and covariance estimated from the sample points are accurate to the second order for any nonlinearity [12]. If the priori random variable is Gaussian, the posterior mean and covariance are accurate to the third order for any nonlinearity [13]. The first use of an unscented Kalman filter for land navigation positioning system is described in [15]. To our knowledge, apart from our work, only one paper has been recently written on the use of the unscented Kalman filter as the fusion method in an integrated navigation information system [16]. An unscented Kalman filter has also been used for GPS positioning [17]. In the following sections, we will

look into more details of the use of unscented Kalman filter over the extended Kalman filter for an integrated navigation information system.

EXTENDED KALMAN FILTER

The extended Kalman filter predicts the states of the random process with equation (5). The predicted states are updated with the measurements in equation (6) [2].

$$x_{k+1|k} = \Phi_{k+1|k}[x_{k|k}] + w_k \quad (5)$$

$$z_{k+1} = H_{k+1|k}[x_{k+1|k}] + v_k + 1 \quad (6)$$

where $x_{k+1|k}$ is the predicted process state vector, $x_{k|k}$ is the estimated process state vector, $\Phi_{k+1|k}$ is the discrete state transition matrix from k to $k+1$, w_k is the process noise vector, z_{k+1} is the measurement vector, $H_{k+1|k}$ is the observation matrix and v_{k+1} is the measurement noise vector.

In our study, we have 13 states to describe the random process. A position-velocity-acceleration model is used for each component of the position [11]. The last four states include the slope, the pitch, the azimuth and the yaw velocities. The state transition matrix $\Phi_{k+1|k}$ is linear. Only the observation matrix $H_{k+1|k}$ contains nonlinear equations, the most relevant for horizontal positioning is described by equation (7).

$$\begin{bmatrix} a_R \\ a_P \\ a_Y \end{bmatrix} = \begin{bmatrix} \cos(\Phi_Y)\cos(\Phi_P) & -\sin(\Phi_Y) & \cos(\Phi_Y)\sin(\Phi_P) \\ \sin(\Phi_Y)\cos(\Phi_P) & \cos(\Phi_Y) & \sin(\Phi_Y)\sin(\Phi_P) \\ -\sin(\Phi_P) & 0 & \cos(\Phi_P) \end{bmatrix} \begin{bmatrix} a_N \\ a_E \\ a_D \end{bmatrix} \quad (7)$$

where a_R , a_P , a_Y are the acceleration vector components along the roll, the pitch and the yaw axis respectively, Φ_P and Φ_Y are the euler angles for the pitch and the yaw axis respectively; a_N , a_E , a_D are the acceleration along the north axis, the east axis and the down axis respectively.

The extended Kalman filter approximates the non-linear matrix H based on the Taylor series expanded about the estimated state vector with

$$H[\hat{x}_{k+a|k}] \approx H[\hat{x}_{k|k}] + \frac{\partial H[\hat{x}_{k|k}]}{\partial \hat{x}_{k|k}} (\hat{x}_{k+1|k} - \hat{x}_{k|k}). \quad (8)$$

The linear approximation often introduces large errors in the estimated state vector and can lead to the divergence of the filter.

THE UNSCENTED KALMAN FILTER

The unscented Kalman filter is based on the unscented transformation, which is a method for reckoning the statistics of a random variable undergoing a non-linear transformation. A set of $2n_\chi + 1$ weighted samples are deterministically chosen to capture the true mean and variance of the prior random variable.

$$n_\chi = n_x + n_w + n_v \quad (9)$$

where n_x is the number of process states, n_w is the dimension of w_k and n_v is the dimension of v_k . The unscented Kalman filter approximates the non-linear observation matrix by

$$H[\hat{x}_{k+1|k}] \approx \sum_{i=0}^{2n_\chi} W_i H[\hat{x}_{i,k+1|k}^x] + \chi_{i,k+1}^v \quad (10)$$

where W_i are the weights, $\hat{x}_{i,k+1|k}^x$ are the sigma points describing the prior predicted states and $\chi_{i,k+1}^v$ are the sigma points describing the measurement noise.

In order to obtain statistically reliable data on the performance of both algorithms, one hundred Monte Carlo simulations have been run for each sensor fusion method [20]: For each sampling time, the estimated positions from the Monte Carlo simulations form the sampling distribution. There were 26639 measurement vectors for each Monte Carlo simulation. These sampling distributions approximate the truth continuous distributions of the posteriori random variables describing the estimated positions. The first moment of each sampling distribution has been computed and used for the computation of the performance metrics. The two performance metrics usually encountered in data fusion systems analysis are the accuracy/precision of the fusion and the computational time to perform the fusion. The accuracy is evaluated by taking the Euclidian distance between the estimated position and the true position. The mean and the variance of the Euclidian distances for the whole simulation are reckoned. The variance describes the precision of the fusion method. The horizontal position is described by the tangential plane located at the real vehicle position whose coordinates are given by the latitude and the longitude.

In [2] we give detailed results showing that the unscented Kalman filter has slightly better results for horizontal positioning than the extended Kalman filter. The estimated position is less biased for the unscented Kalman filter than for the extended Kalman filter. It shows also that the unscented Kalman filter is more precise than the extended Kalman filter. However, contrary to the claim in [12,13], we found that the computational cost of the unscented Kalman filter is significantly greater, by a factor larger than 20, than the computational cost of the extended Kalman filter. The significant execution time difference is related to the number of times equations (5) and (6) are evaluated for each fusion algorithm. With the unscented Kalman filter, these equations are evaluated 75 times, once for each sigma point. With the extended Kalman filter, the Taylor series expansion of these equations are only evaluated once at each iteration. Furthermore, the Jacobian of the matrix H used in the Taylor series expansion is calculated only once because the observation equations are static. Thus the multiple computations of equations (5) and (6) by the unscented Kalman filter at each iteration is responsible for the larger computational cost.

Surprisingly, we found that the unscented Kalman filter is less performant than the extended Kalman filter when there is no GPS solution available. In that situation, the acceleration of the vehicle measured by the IMU is used to estimate the vehicles position described by equation (7). This equation represents the nonlinear transformation of the estimated states which are assumed to be Gaussian random variable in order to predict the IMU measurement. The performance of both filters depends on their capacity to estimate the mean of the resulting random variable. An empirical analysis has been made to evaluate this capacity. In this experiment, each state has been modelized by a discrete Gaussian random variable with 100 realizations distributed uniformly in the range of possible values with a 99% probability of realization. Each realization is present a number of times proportional to its probability of realization in the statistical data representing the probability function. Thus, 24060 samples modeled each random variable. The nonlinear function described by equation (7) is then applied to these random variables and the means of the resulting random variables are computed. The same discrete random variables have been used with the Taylor series expansion of equation (7).

In the extended Kalman filter, the linearization occurs around the states estimated at the previous iteration. The lin-

Estimated state	EKF	UKF
Roll acceleration	0.0064 %	0.8070 %
Pitch acceleration	0.0218 %	1.2876 %
Yaw acceleration	0.2482%	0.0754 %

Tabla 2. Difference between the real mean and the estimated mean of the a posteriori density.

earized equation is applied to the predicted states at the current time. The linearization error is directly proportional to the difference between the estimated states and the predicted states. For the empirical analysis, the mean variation between the estimated value and the predicted value obtained with the extended Kalman filter for one Monte Carlo simulation has been taken. Table 2 shows the variation between the real mean of the a posteriori probability density and the estimated mean of the a posteriori probability density obtained with the Taylor series expansion and the unscented Kalman filter respectively. As can be seen, the unscented Kalman filter provides no significant improvement over the extended Kalman filter and even brings a degradation in performance for two acceleration components (roll and pitch). The superiority of the unscented Kalman filter happens only when the variation between the predicted states and the estimated states is important. However, due to the low dynamics of the vehicle, most of this variation is not important enough to generate a significant linearization error for the EKF.

THE USE OF NEURAL NETWORKS IN POSITIONING SYSTEMS

A centralized fusion implied the use of only one algorithm which fuses all the measurements provided by the sensors. The engineering labour required to construct a centralized Kalman filter can be very high. For this reason, most of the GPS/INS systems have decentralized filters, which gain in simplicity. However, the price to pay is a loss of precision compared with a centralized architecture [21]. An attractive alternative is to use a neural network (NN) for the data fusion. Indeed, a centralized NN is no more difficult to realize than a decentralized one. NNs have already been applied to data fusion related to positioning problem in robotic with success [18], [22]. The major advantage of an NN compared to a Kalman filter resides in the fact that it doesn't need any

a priori statistical and mathematical model to find a function which maps optimally the inputs with the outputs, in our case the absolute position. The most difficult task is to gather some sensor data which can cover adequately the different manoeuvres to be encountered by a road vehicle and its dynamic. The manoeuvres are a function of the road geometry and the vehicle's performance. For example, a NN trained with measured data coming only from a straight road segment may not be able to give a good position when the vehicle meets a curve.

A NEURAL NETWORK FOR DATA FUSION

As described in more details in [3, 19], we used a feed-forward backpropagation neural network that was trained with 14939 training data set for 2000 epochs. The NN has 4 layers composed of 20, 20, 20 and 3 neurons respectively. The corresponding transfer functions are linear, log-sigmoid, tan-sigmoid and linear. This architecture was the most promising of the 12 architectures investigated with various number of layers, transfer functions and number of neurons trained initially for 100 epochs. Batch training was preferred over iterative training for its computation efficiency. The mean square error gave the training performance at each epoch. The second order training method was the scaled conjugate gradient. This method requires only $O(N)$ operations per epoch compared to others methods like Gauss-Newton $O(N^3)$ and Levenberg-Marquardt $O(N^3)$ [24, 19]. When considering the network size, the other training methods were impractical. Table 3 contains the NN's inputs.

The GPS receiver sampling frequency is usually lower than those of the inertial measurement unit or the differential odometer. For synchronization purpose, a boolean entry specifies to the NN if a GPS solution is available. A centralized Kalman filter has been realized to have a reference for the evaluation of the NN's performances. The centralized Kalman filter has 13 states and 10 measurements. The simulation generates 26430 data samples.

Data	Sensor
Latitude	GPS
Longitude	GPS
Altitude	GPS
Percent Dilution Of Precision (PDOP)	GPS
Linear acceleration	INS
Horizontal centripetal acceleration	INS
Vertical centripetal acceleration	INS
Yaw angular velocity	INS
Pitch angular velocity	INS
Total traveled distance	Diff. odometer
Azimuth	Diff. odometer
GPS solution availability	GPS
Sampling time	IMU

Tabla 3. Neural network inputs.

Position	Kalman (m)	ANN (m)	Gain (%)
Latitude	2.73	9.34	-242.90
Longitude	12.44	3.56	71.38
Altitude	49.21	0.38	100.78

Tabla 4. Mean of the positioning errors by the Kalman Filter and the NN.

DATA FUSION RESULTS USING NEURAL NETS

The mean and variance of the positioning error during the simulation was computed. Table 4 indicates that the positions estimated by the NN are less biased for the longitude and altitude but more biased for the latitude than the same positions estimated by the Kalman filter. The NN's estimation biases don't exceed 10 meters. So even if the NN is a biased estimator, it still meets the required performance.

As shown in Table 5, the variances of the latitude errors and the altitude errors for the NN are less than those of the Kalman filter. The variance of the longitude errors is 5 percent more for the NN than for the Kalman filter. The performance of the NN is generally better than the performance of the Kalman filter in a mean square error sense. The important gain for the altitude is caused by the NN's ability to estimate the bias of the GPS altitude.

It can be seen here that NNs can be used as a centralized fusion method. The results show that neural networks are

Position	Kalman	ANN	Gain (%)
Latitude	1073.2	606.1	43.52
Longitude	994.8	1029.7	-3.51
Altitude	12952.0	2.4	99.98

Tabla 5. Variance of the positioning errors by the Kalman filter and the NN.

an attractive alternative to the Kalman filter as a centralized fusion method. In [3], we show also how NNs can also be used as nonlinear pre-processing filters for the land navigation positioning problem. In that paper, we show the NN's capability to successfully learn nonlinear functions when applied to GPS and differential odometer measurement pre-filtering. The major difficulty with an NN is to have access to ground truth data for the supervised training. Usually, the only solution is to have access to some data coming from a reference usually given by high precision, high cost sensors. Some further researches on this topic include the evaluation of various NNs with real sensors and the replacement of the feed-forward backpropagation NN with a recurrent NN.

ROBUST AND ADAPTIVE POSITION ESTIMATE IN PRESENCE OF SENSORS FAULTS

So far, we considered the case of continuously operating noisy sensors. But what happens to the data fusion process and the position estimate if one of the sensors fails? Either from a user's safety point of view or a designer's perspective, all automotive navigation systems should be fully reliable and prevent faults or failures. In all but the most trivial cases the existence of a fault may lead to situations with safety, health, environmental, financial or legal implications. Although good design practice tries to minimize the occurrence of faults and failures, it is recognized that such events do occur. In such cases, faulty sensors must be detected and the system must be able to reconfigure itself so as to overcome the deficiency caused by the fault. In brief, a navigation system must be robust and adaptive. Faults can cause the loss of the overall performance of a system, which may present hazards to personnel or lead to unacceptable economic loss. In order to minimize the impact, fault detection schemes must be developed. Actually, several fruitful research efforts in the field of fault detection

and filter based adaptive architectures, combining fault detection and data fusion, have been proposed to improve the reliability and adaptability of various control systems [32, 33, 34]. However, little has been published in the area of automotive navigation systems.

FAULT DETECTION ARCHITECTURE

A fault is usually defined as an undesired change in system estimated parameters that degrade partial or overall performance. Fault detection is a binary decision making process. Either the system is functioning properly, or there is a fault present. Generally speaking, fault detection consists of two processes: residual generation and decision making, as shown in Figure 2 [28, 29].

RESIDUAL GENERATION

Residuals are defined as the resulting differences between analytically redundant quantities in the system model. These are similar to innovations generated by a Kalman filter, which are the differences between the measured and estimated outputs. Under normal conditions, residuals are small or zero mean; while the occurrence of a fault causes the residuals to go to non-zero or unusually large values.

DECISION MAKING

The decision making process, which acts as an arbitrator, involves assessing the residuals and identifying when and where any abnormalities occur. This is done through threshold testing both static and dynamic residual behaviors, and various statistical tests, where the thresholds are typically based on signal/residual variance.

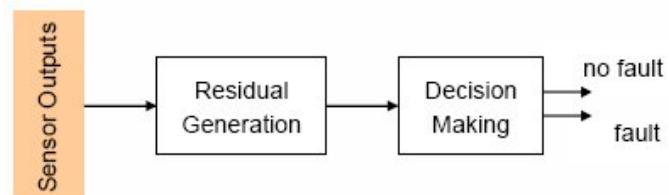


Figura 2. Fault Detection Architecture.

Source of errors	Standard deviation (m)
<i>Common</i>	
Ionosphere	7.0
Clock and ephemeris	3.6
Troposphere	0.7
<i>Non-common</i>	
Receiver noise	0.1~0.7
Multipath	0.1~5.0

Tabla 6. GPS Error Sources and their Approximate Deviation [27].

SENSOR FAULTY MODELS

So far, although the precision and reliability of sensors are improved significantly with the development of the technology, various sensor faults driven by different situations do exist. In the following, several faulty scenarios of sensors are investigated and discussed.

GLOBAL POSITIONING SYSTEM (GPS) FAULTY MODEL

A low-cost GPS receiver can output the vehicle position and driving speed. However, the measurement is likely to be corrupted by time-correlated noise and the GPS signal is susceptible to jamming. However, the position and velocity measurements do not drift over long periods of time. A GPS faulty model can be based on four particular parts: typical error budget, environmental interferences, signal loss, and hardware malfunction.

Typical Error Budget

The main error sources in GPS are listed in Table 6. These errors can be divided into two categories [1]: common and non-common. Common errors are approximately the same for receivers operating within a limited geographic region. Non-common errors are unique to each receiver and depend on the receiver type and multipath mitigation technique being used (if any). The point of this classification is that DGPS can effectively remove the common errors.

Environmental Interferences

GPS satellite signals, as with any other radio signals, are subject to some form of interference and jamming. It is

known that GPS satellite currently transmit position information in the 1,500-MHz frequency band with a typical accuracy under 100 meters to anyone in the world who has a simple receiver costing as little as \$100. Any electronic systems generating radio signals in this frequency band, main lobe or side lobe, will tend to be a source of interference to the GPS receiver. With the popularization of personal radio and Wi-Fi devices, electromagnetic interferences, intentional or unintentional, are more and more serious. As an example, the proliferation of ultra-wideband (UWB) devices intended to be mass-marketed to the public could cause harmful interference to GPS.

Signal loss

GPS is a line-of-sight sensor, and therefore GPS measurements are subject to signal outages. If it cannot “see” four satellites, then it will not produce the expected output. This case is called signal loss. It may include the following scenarios:

- Urban environments with all buildings (the so-called urban canyons).
- Inside parking structures.
- In a long tunnel without any relay station.
- Under heavy foliage.
- Under bridges.

Hardware Malfunction

A GPS receiver hardware malfunction can be caused by any abnormality of its components, such as antenna, amplifier, reference oscillator, frequency synthesizer, wire disconnection, and power lost, resulting to no output, or provide an unstable or incorrect signal. Compared to the other sources of GPS faults, the probability of a hardware malfunction of the GPS receiver is rather low and can be considered negligible. Taking all the above into account, the GPS faulty model can be described as in Figure 3.

INERTIAL MEASUREMENT UNIT (IMU) FAULTY MODEL

A low-cost IMU can output the vehicle accelerations and angular rate which can then be integrated by an Inertial

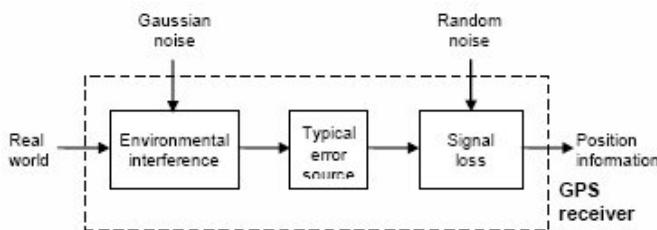


Figura 3. GPS Faulty Model.

Navigation System (INS) to obtain the vehicle position, velocity, and attitude. The advantage of an INS is low sensitivity to high-frequency noise and external conditions. But the measurement error of INS will accumulate if it is not calibrated on-line. The faulty model is presented in Figure 4 and the scenarios driving the IMU to a faulty state are discussed below:

IMU Error Sources and Faulty Scenarios

1. Bias due to bearing torques (for momentum wheel types), drive excitation feedthrough, electronics offsets and environmental temperature fluctuations. Intuitively, bias is any nonzero sensor output when the input is zero.
2. Scale factor error, often resulting from aging or manufacturing tolerances.
3. Alignment errors: Most stand-alone IMU implementations include an initial transient period for alignment of the gimbals (for gimbaled systems) or attitude direction cosines (for strapdown systems) with respect to the navigation axes. Errors remaining at the end of this period are the alignment errors. These include tilts and azimuth reference errors. Tilt errors introduce acceleration errors through the miscalculation of gravitational acceleration, and these propagate primarily as Schuler oscillations plus a non-zero-mean position error approximately equal to the tilt error in radians times the radius from the earth center. Initial azimuth errors primarily rotate the system trajectory about the starting point, but there are secondary effects due to Coriolis accelerations and excitation of Schuler oscillations.
4. Cross coupling error (non-linearity).

5. Quantization error, which is inherent in all digitized systems.
6. Fault due to one or multiple of the moving parts wear out or jam, or gimbals lock.

IMU FAULTY MODEL DIAGRAM

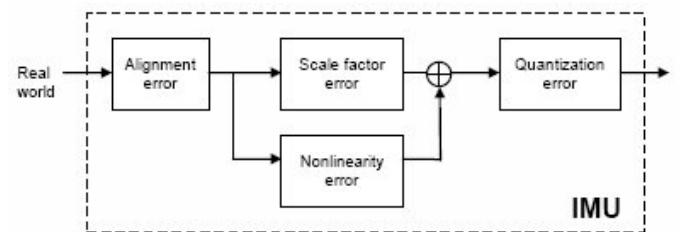


Figura 4. IMU Faulty Model.

ODOMETER FAULTY MODEL

An odometer is one of the most common devices used for tracking and relative positioning of vehicles. In the transmission-based odometer, the distance to be determined is based on the number of counts for the wheel and calibration constants which are proportional to the radius of the tire. Thus any potential trends that change the radius and the number of counts can drive the odometer to a faulty output.

Tire radius change

The major sources of tire radius variation are listed in the following reference [30]:

1. Tire radius tends to increase as vehicle velocity increases because of increasing centrifugal force on the tire.
2. Tire radius tends to increase as air pressure within the tire increases due to increase tire temperature or other factors.
3. Tire radius tends to increase as tread is worn off during the lifetime of the tire.

Road Situation

These kinds of error sources depend on the road situation, including:

- Running over objects on the road, slips or skids involving one or more wheels when the vehicle accelerates or decelerates too rapidly or travels on a snowy, icy, or wet road.
- In sharp turns, the contact point between each wheel and the road can change, so that the actual distance between the left and right wheels will be different from the one used to derive the heading.

Gears Tooth Lost

An odometer can operate by counting the pass of teeth or tabs of the ferrous wheel mounted on the rotating shaft of the vehicle. If one or more teeth are lost, then the value will abate n/t , where n is the number of the lost teeth, t is the total teeth of the wheel. In the real situation, the occurrences of losing three or more teeth are so puny that they can be omitted.

In brief, the wear out of the tire, the pressure of the tire, the velocity of the vehicle, the slippage of the tire, and the gear teeth lost will contribute to the odometer fault.

INCLINOMETER FAULTY MODEL

The error sources of the inclinometer may consist of:

1. Error caused by thermal expansion or temperature changes. A normally distribution band-limited white noise is used to demonstrate the thermal noise.
2. Drift, calibration error or quantization error due to analog to digital converter resolution.
3. Electromagnetic interference (the major component of the inclinometer faulty model). It can be a uniform or a Gaussian distribution, or a combination of both. The variance and amplitude depend on the traveling environment.
4. Power lost or hardware malfunction: A permanent fault, but since it is only in a very low possibility, it is omitted in this simulation.

MAGNETIC COMPAS FAULTY MODEL (fluxgate compass)

A magnetic compass is an inexpensive absolute direction sensor. The main drawback with this device is that the quantity measured, i.e. the intensity and direction of the magnetic field, can be distorted in the presence of metals and other electrical or magnetic fields, such as power lines, transformers and cars powertrain system.

Compass operations include the following error sources:

1. Hilly road error [31]: When the vehicle is traveling over a hilly road, the compass plan will not be parallel to the plane of the Earth surface. The compass measures only the projection of the vector components. This is a short-term magnetic anomaly.
2. Random noise error [31]: a) In the situation of traveling nearby power lines, big trucks, steel structures (such as freeway underpasses and tunnels), reinforced concrete buildings, or bridges (short-term magnetic anomalies); b) In an environment of electrical or magnetic noise, or magnetization of the vehicle body (long-term magnetic anomalies).
3. Calibration error: Misalignment of the compass with respect to the vehicle frame simply results in a constant error. This type of error can also be attributed to an inaccurate estimation of the current declination.
4. Permanent fault: power lost or interface cable disconnected (very low possibility, they are being omitted in the simulation).

ADAPTIVE AND ROBUST DATA FUSION ARCHITECTURE

In positioning navigation systems, high precision and reliability with low cost are always pursued. Actually, for road navigation, the benefits of the information obtained by the fusion process make it possible to use multiple less powerful, lower cost sensors to achieve as good a performance as those much more expensive ones. Kalman filter and its derivatives, the most popular data fusion methods, have been used extensively in autonomous or assisted navigation system for several years. But almost all of these applications are based on the assumption that all sensed data

are complete and reliable. If one or more sensors are faulty, then the fusion filters will tend to choke. In order to ensure a reliable positioning estimate in the case of faulty sensors, an adaptive approach is proposed as in Figure 5.

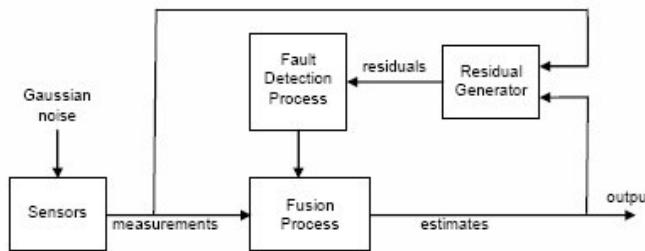


Figura 5. Adaptive Sensor Fusion System.

As most of the navigation systems, the objective of the above system is to make the position estimate of the vehicle as accurate and reliable as possible. Sensors (GPS, IMU, odometer, inclinometer and compass) data which are used to compute the position and attitude of the vehicle, often involve sources of uncertainties. Meanwhile, a state space model can be constructed from the vehicle dynamic to perform the function of sensor fusion. Both their outputs (measurements and estimates) can be combined together through a particular function so as to generate a residual signal. Passing this signal through a detection process, a decision is made: either the system is running properly, or there is a fault occurring, which leads to the fusion process rerunning to optimize the position estimates. From the diagram above, we can see how a residual signal generator and a fault detector are embedded into the conventional data fusion architecture. A Kalman filter approach is used, since it is simpler and more effective to attain the residual signal via state estimation. The key idea is to reconstruct the outputs of the process with the aid of Kalman filter and to use the estimation error, or some particular statistical functions of them to assess the residual signal.

Then the faultiness can be detected by considering the residual properties against some threshold. If any information from the sensors is detected to be faulty (residual properties go over a given threshold), then the corresponding measurements are discarded. In that case, the position estimate needs to be re-updated. In this approach, fault detection and data fusion are combined into a single Kalman architecture to construct a fault tolerance, robust and adaptable vehicle positioning system.

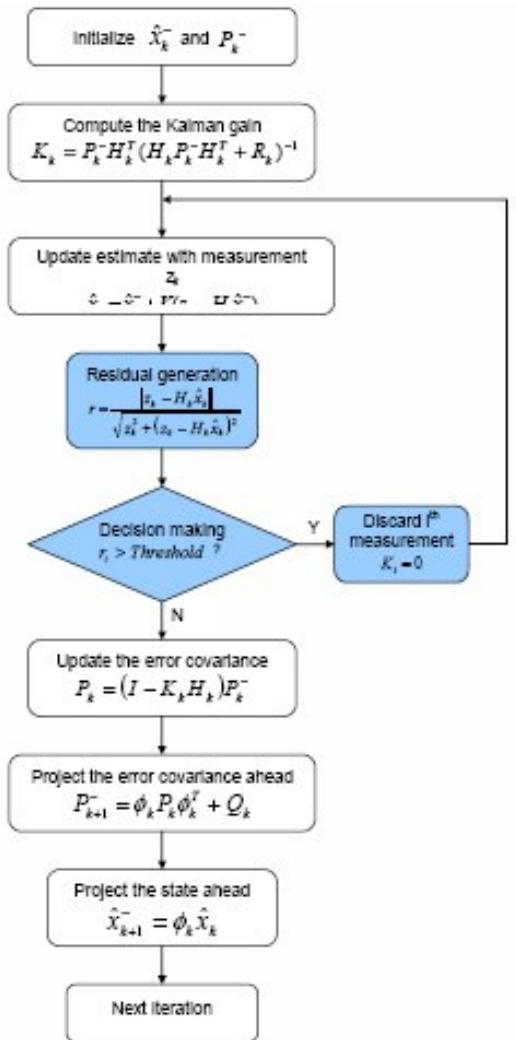


Figura 6. Adaptive Sensor Fusion Architecture Flow Chart.

The detailed flow chart is shown in Figure 6. Note that the shaded blocks are part of the fault detection process. Tests results given in [4] show that the proposed Kalman filter based state estimation scheme ensures that the position estimate is always optimal and brings significant benefit to the data fusion system comparing with the conventional fusion architecture without fault detection, in particular for the frequent GPS signal loss case. Performance analysis and more details on this architecture can be found in [4].

COLLABORATIVE DATA FUSION SYSTEMS

So far we have considered the case of a single vehicle only. In real life however, cars are not alone on the road. We may therefore ask ourselves the following questions: can we take advantage of the other vehicles proximity and positioning data to improve our own position, and if yes, how? The intelligent vehicle systems (IVS) envisioned here would be able to communicate their position and navigation information through Inter-vehicle communications (IVC). IVS will be evolving in mobile Ad hoc networks called (MANET) that give access to valuable real time data, especially high precision positioning information. However, in terms of global navigation systems (GNS), individual vehicles in a given MANET would not have access to the same constellation of satellites. And certainly vehicles with good lines of sight (LOS) have more precise positioning estimates than vehicles with a poor LOS. Moreover, some vehicles may possess high precision DGPS or beacon-based positioning information to share in the network.

In this section, we will investigate a collaborative positioning architecture (CPA) that uses some of the above IVC features, along with additional range measurement capabilities, to ameliorate positioning estimates of neighboring vehicles in a MANET [5]. Two vehicles at different locations can have different sets of visible satellites, and by collaboration the satellite information can be shared between the vehicles [35]. Many research activities are being conducted in IVS collaborations. See [38] for a more basic, yet good introduction to IVS research and development. For a little more technical, but quite outdated now, [39] would be worth reading. Research in the domain of collaborative navigation takes many forms for instance Collaborative Driving Systems (CDS) are studied with applications in what is called car platoons [40] and [41]. However these kinds of collaborations necessitate either costly vehicle-to-vehicle relative dependence or vehicle-to-infrastructure dependence, whereas our approach leads to a more inexpensive independent navigation. We will treat here only the case of three vehicles, as shown in Figure 7, which, although limited, is yet important towards a more general case.

Designing a system solution for accurate estimation of relative positions of neighboring vehicles based on real-time exchange of individual GPS coordinates using vehicle-to-vehicle radio communications is a challenging task [36].

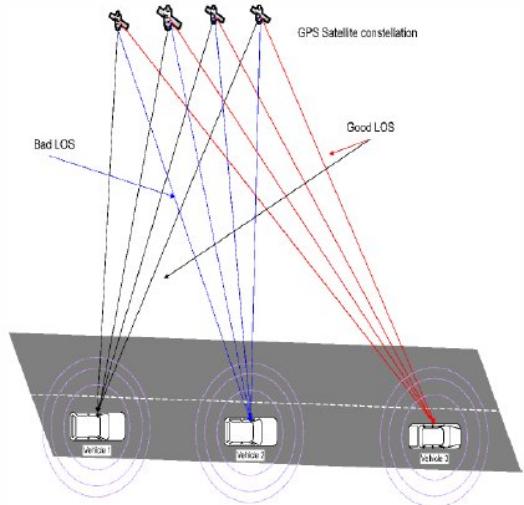


Figura 7. Collaborative positioning architecture.

Prior to performing any detailed analysis of our CPA we ought to define the scope of our work with conditions under which our technique could be applied. We thus suppose the following conditions to be valid:

- All vehicles in the MANET are equipped with necessary navigation items (GPS, DR, IVC sensors, etc.)
- All vehicles have range measurement radars, to provide precise inter-vehicle distance. Millimeter wave radars MMW for automotive, studied in [3], would be appropriate solution to our application for they have a high Doppler sensitivity and a 200 meters range with a good precision which is very suitable for our case.
- No vehicle dynamics are considered in the CPA, we instead used a simple motion model.
- Error covariance matrix on position, heading, and inter-vehicle distance contains the global errors of vehicle systems.
- No special vehicle frame is considered.
- Coordinate reference system is geodetic altitude, latitude and azimuth.
- No altitude difference is considered, this corresponds to the case where all three vehicles are located on a relatively flat plane with a constant altitude.
- Inter-vehicle communications are real time and safe.

COLLABORATIVE UNCERTAINTY MINIMIZATION

Therefore, in this distributive, collaborative approach, each vehicle has its own set of position estimates as well as other information such as range information from other neighboring vehicles. To achieve a collective improvement of position estimates, we consider the geometric data fusion approach. This method is based on the geometric analysis of the sensing uncertainty and is motivated by the geometric idea that the volume of the uncertainty ellipsoid should be minimized, as illustrated in Figure 8. The resultant fusing equation coincides with those obtained by Bayesian inference, by Kalman filter theory, and by weighted least-squares estimation [42]. The uncertainty ellipsoid encloses a region in space where the true value most likely exists. The center of the ellipsoid is the mean of the measurement and the ellipsoid boundary represents a distance of one standard deviation from the mean [43].

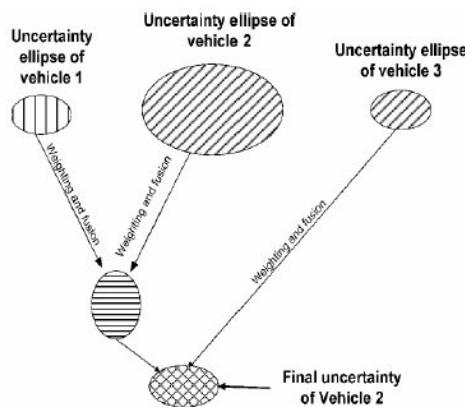


Figura 8. Principle of geometric data fusion approach in collaborative positioning of vehicles.

Geometric data fusion has been used in many research applications; [43] and [44] are few examples; and had proven to be a powerful uncertainty management data fusion technique. In our paper [5], we show that a collaborative approach can further improve the position estimate over a conventional data fusion approach. More mathematical details and performance analysis can be found in the paper [5].

CONCLUDING REMARKS

In this paper, we have surveyed the positioning estimation problem applied to land navigation systems and reviewed some of the various sensor fusion techniques usually encountered in such systems. We have discussed their relative performance and limitations. The extended Kalman filter (EKF) in a centralized data fusion architecture remains a design of choice for most applications. We have explained how to make such systems more robust by detecting and identifying sensor faults. Finally we looked at the possibility to exploit the presence of several vehicles in the vicinity, in order to improve ones own position estimate using a collaborative and geometric data fusion approach. With the current evolution of the technologies, positioning sensors will become more and more easily available and at lower cost, thus allowing all vehicles to be equipped with such technologies. In addition, all vehicles are becoming networked and equipped with wireless communication capabilities, thus allowing the use of distributed and collaborative techniques for navigation and positioning. More embedded and distributed intelligence is likely to be encountered in future positioning and navigation systems.

ACKNOWLEDGEMENTS

I would like to thank the Canadian NCE AUTO21 for funding this research project, the University of Calgary for providing the acceleration data, Geomatic Canada for the topographical information and E. A. Wan, R. v. d. Merwe and OGI School of Sciences for the Rebel Toolkit. I would like also to thank my former students Mathieu St-Pierre, Guopei Liu and Rabah Abdessamie for their original contributions in this area. Finally, I would like to express my thanks to the Universidad Autónoma de Zacatecas, Mexico and my colleagues at the PDS Lab at UAZ, headed by Dr Gerardo Miramontes, for their kind support and advices during the writing of this paper.

Bibliografía

- [1] Jay Farrell and Matthew Barth, The Global Positioning System and Inertial Navigation, McGraw-Hill, 1999.
- [2] St-Pierre M., Gingras D., Comparison between the unscented Kalman filter and the extended Kalman filter

- for the position estimation module of an integrated navigation information system, IEEE Intelligent vehicles Conference, Parma, Italy, June 2005.
- [3] St-Pierre M., Gingras D., Neural network based data fusion for vehicle positioning in land navigation system, SAE-2004 conference, paper no. 345 Conference, Detroit, 2004.
- [4] Guopei L., Gingras D., Adaptive and Reconfigurable Data Fusion Architectures in Vehicle Positioning Navigation Systems, SAE-2007 conference, paper no. 1108 Conference, Detroit, 2004.
- [5] Abdessamie R., Gingras D., A collaborative navigation approach in intelligent vehicles, SAE conference 2008, paper no 1249 Detroit, 2008.
- [6] M. S. Grewal, L. R. Weill, and A. P. Andrews, “Global Positioning Systems, Inertial Navigation, and Integration”, John Wiley & Sons, New York, 2001.
- [7] E. Abbott and D. Powell, “Land-Vehicle Navigation Using GPS”, Proceedings of the IEEE, 1999.
- [8] R. E. Kalman, “A new approach to linear filtering and prediction problems”, Transactions of the ASME, Journal of Basic Engineering, 1960.
- [9] A. Gelb, “Applied Optimal Estimation”, The MIT Press, Cambridge, Massachusetts, 1974.
- [10] B. Anderson and J. Moore, “Optimal Filtering”, Prentice Hall, Englewood, NJ, 1979.
- [11] P. Y. H. Robert Grover Brown, Introduction to Random Signals and Applied Kalman Filtering, John Wiley and Sons, New York, 1997.
- [12] A. D. R. Merwe, N. Freitas, E. Wan, “The Unscented Particle Filter, Tech report CUED/F-INFENG/TR-380”, Cambridge University Engineering Department, Cambridge, England August 2000.
- [13] E. A. Wan and R. v. d. Merwe, “The Unscented Kalman Filter for Nonlinear Estimation”, Proceedings of Symposium 2000 on Adaptive Systems for Signal Processing, Communication and Control (AS-SPCC), Lake Louise, Alberta, Canada, 2000.
- [14] S. J. Julier and J. K. Uhlmann, “A New Extension of the Kalman Filter to Nonlinear Systems”, In Proc. of AeroSense: The 11th Int. Symp. on Aerospace/Defence Sensing, Simulation and Controls, 1997.
- [15] S. Julier, “Process Models for the Navigation of High-Speed Land Vehicles”, Wadham College, Oxford, 1997, pp. 184.
- [16] W. Li and H. Leung, “Constrained Unscented Kalman Filter Based Fusion of GPS/INS/Digital Map for Vehicle Localization”, IEEE INTERNATIONAL CONFERENCE ON INTELLIGENT TRANSPORTATION SYSTEMS, Shanghai, 2003.
- [17] X. Mao, M. Wada, H. Hashimoto, M. Saito, and I. Suzuki, “EM/Unscented Smoothing Based Parameter Learning for Nonlinear Models for GPS Positioning”, 10th World Congress on Intelligent Transport Systems, Madrid, 2003.
- [18] T. F. Futoshi Kobayashi, Fumihito Arai, Sensor fusion system using recurrent fuzzy inference, Journal of Intelligent and Robotic Systems, 23, October 1998.
- [19] M. T. Hagan and M. Menhaj, Training feedforward networks with the Marquardt algorithm, IEEE Transactions on Neural Networks, 1994.
- [20] K. T. Keith A. Redmill, John I. Martin, Sensor and data fusion design and evaluation with a virtual environment simulator, Proceedings of the IEEE Intelligent Vehicles Symposium, 2000.
- [21] D. T. Knight, Rapid development of tightly-coupled gps/ins systems, IEEE Aerospace and Electronic Systems Magazine, 12(2), February 1997.
- [22] J. B. P. D. Beattie, Self-localisation in the senario autonomous wheelchair, Journal of Intelligent and Robotic Systems, 22:255–267, 1998.
- [23] O. R. H. Teong Chee Chuah, Bayan S. Sharif, Robust adaptive spread-spectrum receiver with neural-net pre-processing in non-gaussian noise, IEEE Transaction on Neural Networks, 12(3), May 2001.
- [24] Y. B. P. H. Yann LeCunn, Léon Bottou, Gradient-Based Learning Applied to Document Recognition, chapter 9, IEEE press, 2001.

- [25] Q. Wu, Z. Gao, and D. Wan, “An adaptive information fusion method to vehicle”, IEEE Position location and navigation symposium, 2002.
- [26] K. A. Redmill, T. Kitajima, and U. Ögüner, “DGPS/INS Integrated Positioning for Control of Automated Vehicle”, IEEE Intelligent Transportation Systems, Oakland, 2001.
- [27] Jon Kronander, Robust Automotive Positioning: Integration of GPS and Relative Motion Sensors, December 2004.
- [28] Masafumi Hashimoto, Hiroyuki Kawashima, Takashi Nakagami, and Fuminori Oba, Sensor Fault detection and Identification in Dead-Reckoning System of Mobile Robot: Interacting Multiple Model Approach. Proceedings of the 2001 IEEE/RSJ International Conference on Intelligent Robot and Systems, Mani, Hawaii, USA, Oct. 29 Nov. 03, 2001.
- [29] S. M. Magrabi and P. W. Gibbens, Decentralized Fault Detection and Diagnosis in Navigation Systems for Unmanned Aerial Vehicles, IEEE Position Location and Navigation Symposium, San Diego, 2000.
- [30] Thomas W. Lezniak, Richard W. Lewis, and Robert A. Mcmillen, A Dead Reckoning/Map Correlation System for Automatic Vehicle Tracking, IEEE Transactions on Vehicular Technology, Vol. VT-26, No.1 February 1977.
- [31] Yilin Zhao, Vehicle Location and Navigation Systems, Norwood, Artech House, 345 p, 1997.
- [32] R. Patton, P. Frank and R. Clarck, Fault Diagnosis in Dynamic System: Theory and Applications, Prentice Hall, 1989.
- [33] A. D. Pouliozos and G. S. Stavrakakis, Real Time Fault Monitoring of Industrial Processes, Kluwer Academic Publishers, 1994.
- [34] R. Isermann, Fault-Diagnosis Systems: An Introduction From Fault Detection To Fault Tolerance, Springer Verlag, 2005.
- [35] Berefelt F., Boberg B, Nygards J., Stromback P, Wirkander S.-L., Collaborative GPS/INS Navigation in Urban Environment, Swedish Defence Research Agency (FOI)
- [36] Kukshya, V., Krishnan, H., Kellum, C. Design of a System Solution for Relative Positioning of Vehicles Using Vehicle-to-Vehicle Radio Communications During GPS Outages, IEEE
- [37] William D., FMCW MMW Radar for Automotive Longitudinal Control, California PATH Research Report UCB-ITS-PRR-97-19.
- [38] Nirupama B., Wireless Sensor Networks, A Systems Perspective, 2005 Artech House, Boston.
- [39] Jurgen, R. K., Navigation and Intelligent Transportation Systems, Progress In Technology, Automotive Electronics Series, 1998.
- [40] Gaubert, N., Beauregard, M., Michaud, F., de Lafontaine, J., Emulation of Collaborative Driving Systems Using Mobile Robots; Systems, Man and Cybernetics, 2003. IEEE International Conference on Volume 1, 5-8 Oct. 2003 pp. 856-861 vol.1
- [41] Crawford S., Cannon M.E., Performance Evaluation of Sensor Combinations for Mobile Platoon Control; Positioning, Location, and Navigation (PLAN) Group, University of Calgary, Calgary Alberta, Canada
- [42] Abidi, M.A., Gonzalez, R.C., Data Fusion In Robotics And Machine Intelligence, Academic Press 1992, pp. 457-479.
- [43] Elliott, J. D., Langlois, D., and Croft, E. A., Sensor Uncertainty Management for an Encapsulated Logical Device Architecture: Part I - Fusion of Uncertain Sensor Data Industrial Automation Laboratory University of British Columbia Vancouver.
- [44] Lee, J., and Ha, I., Real-Time Motion Capture for a Human Body using Accelerometers, Robotica (2001) volume 19, pp. 601610. Cambridge University Press.

Acerca del autor o autores

Denis Gingras, Dr. Ing. es Profesor del Department of Electrical and Computer Engineering, de la Université de Sherbrooke, en Sherbrooke (Québec) Canada. Durante la primavera del 2008 fue Profesor Visitante, integrado al Cuerpo Académico de Procesamiento Digital de Señales (CA:PDS) de la Facultad de Ingeniería Eléctrica, de la Universidad Autónoma de Zacatecas, Zacatecas, México.

Correo-e:denis.gingras@usherbrooke.ca



INSTRUCCIONES PARA AUTORES

DIFU100ci@ (léase difuciencia) es una publicación cuatrimestral del Cuerpo Académico de Procesamiento e Instrumentación óptica, de la Facultad de Ingeniería Eléctrica, Universidad Autónoma de Zacatecas. Tiene como objetivo difundir conocimientos científicos y tecnológicos del área de la ingeniería, a través de artículos de divulgación y artículos que muestren temas de investigación. La revista cuenta con el Certificado de Reserva de Derecho al Uso Exclusivo del Título expedido por el INDAUTOR, Reserva: 04-2010-110314331900-102.

Los trabajos pueden ser clasificados, al menos, en tres categorías: Divulgación, Investigación, y Tutoriales.

Divulgación: Artículos que no necesariamente contienen resultados de proyectos de investigación propiamente. En esta sección también se podrán incluir trabajos que presenten nuevos enfoques a temas de investigación de modo que permitan ampliar su difusión.

Investigación: Se pueden incluir resultados de investigación aunque conservando el enfoque a la divulgación, es decir, no necesariamente con el rigor de un “paper”. Con ese enfoque se pretende motivar aun mayor número de lectores al hacerles llegar los nuevos tópicos que se estudian actualmente. Los trabajos sobre desarrollo tecnológico pueden ser considerados en esta categoría y se recomienda que un mayor número de trabajos correspondan a esa importante tarea.

Tutoriales: Se muestran temas novedosos, pero poco conocidos. O bien, nuevos enfoques a temas básicos, con un objetivo didáctico, de modo que permitan ampliar el conocimiento y motiven su aplicación en proyectos de ingeniería (desarrollo tecnológico). Página provisional de la Revista: <http://www.uaz.edu.mx/gmiram/Revista.htm> **Sobre el formato del texto:** Los trabajos se pueden enviar en formato txt y las gráficas o figuras en formato jpg con buena resolución. De ser posible debe enviarse un solo archivo rar o zip que contenga tanto el texto como las figuras. En el caso de utilizar Word, se deberá enviar en formato .doc, sin utilizar macros (no se aceptará formato docx). También se aceptarán trabajos en formato OpenOffice. No se solicita ningún formato de página en especial, ya que el texto será llevado al formato de la revista. El trabajo debe incluir

1. Título y Lista de autores.
2. Resumen en un máximo de 200 palabras. El Resumen se utiliza como descripción del trabajo en el índice ampliado, y no aparece en el cuerpo del documento (ver algún número anterior como muestra).
3. Cuerpo del documento: El título de las Secciones será en MAYÚSCULAS, debidamente acentuadas. Las Subsecciones en minúsculas con la primera letra en mayúscula.
4. Las ecuaciones deberán indicarse lo más claramente posible, aun en formato txt. Por ejemplo: $H(\omega_1) = z^2 / (z - 0.5)$ where $z = e^{j\omega_1}$
5. Biografía de los autores. El lugar de adscripción se incluirá en una sección “acerca del autor” donde se podrá incluir una breve descripción del puesto que desempeña o ha desempeñado cada autor.

El autor principal deberá enviar debidamente llenado y firmado el formato de “cesión de derechos”, manifestando además que el trabajo no ha sido publicado previamente.

POLÍTICA EDITORIAL:

Los originales serán sometidos a un proceso editorial en varias fases. En primer lugar, los artículos recibidos serán objeto de una evaluación preliminar por parte del Comité Editorial, quien determinará la pertinencia de su publicación, con base a los requisitos temáticos. En la segunda fase, los artículos son enviados a dos pares académicos externos, quienes determinarán en forma anónima uno de los siguientes dictámenes: a) publicar sin cambios, b) publicar después de cumplir correcciones menores, c) publicar una vez que se haya revisado a fondo, d) rechazar. En caso de discrepancia entre los dos árbitros, el texto será enviado a un tercer árbitro, cuya decisión definirá si es aceptado o rechazado. Los resultados del proceso del dictamen son inapelables en todos los casos.

INSTRUCTIONS FOR AUTHORS

DIFU100ci@ (read difuciencia) is a quarterly publication of the Processing and Optical Instrumentation Academic Group, Faculty of Electrical Engineering, Universidad Autonoma de Zacatecas. It aims to disseminate scientific and technological knowledge in the field of engineering, through application oriented articles and articles showing research topics. The magazine has a certified copyright number for exclusive use of the title issued by INDAUTOR, Reserve: 04-2010-110314331900-102.

Aims and Scope: The articles can be classified in at least three categories: Divulgation, Research, and Tutorials.

Divulgation: The articles do not necessarily contain results of research projects themselves. This section will also include works that showcase new approaches to research subjects so as to broaden its distribution.

Research: The articles include research results while maintaining the focus on disclosure (divulgation), ie not necessarily with the rigor of a “paper”. This approach is intended to motivate even more to bring readers to the new topics that are studied today. Works on technological development can be considered in this category and it is recommended to have more articles related to this important task.

Tutorials: These include new issues, but little known. Alternatively, they may include new approaches to basic knowledge, with a didactic purpose, so that will expand knowledge and encourage its application in engineering/technological projects. Provisional Web site of the Magazine: <http://www.uaz.edu.mx/gmiram/Revista.htm>

Format for submmision: The work can be sent in .txt formats and graphics or pictures in .jpg format with good resolution. It will be acceptable to send a single .zip or .rar file containing both the text and figures. In the case of using word, it must be sent in .doc format without using macros (.docx format is not accepted). It will be also accepted as an OpenOffice file. It is not requested any page format, especially since the text will be brought to the format of the magazine.

The article should include:

1. Title.
2. List of authors.
3. Summary in a maximum of 200 words. The summary is used as the article description in the expanded index, and does not appear in the document body (see a previous issue as a sample).
4. Main body of document. The title of the section will be in UPPERCASE, properly spelled. Subsections must be written in lowercase with the first letter capitalized.
5. The equations should be indicated as clearly as possible, even in txt format. For example:
$$H(\omega_1) = z^2 / (z - 0.5) \text{ where } z = e^{(j)\omega_1}$$
6. Biography of the authors. The actual job position will be included in a section “about the author” which may include a brief description of the position played or had played each author.

The lead author must submit the duly completed and signed form of “transfer of rights”, saying that the work has not been published previously.

EDITORIAL POLICY:

Manuscripts will undergo an editorial process in several phases. First of all the items received will be subject to a preliminary assessment by the Editorial Committee, who will determine the relevance of its publication, based on thematic requirements. In the second phase, items are sent to two external academic peers, who determine anonymously one of the following opinions: a) accept unchanged, b) accept after serving minor corrections, c) accept once it has been fully reviewed, d) reject. In case of discrepancy between the two arbitrators, the text will be sent to a third arbitrator, whose decision will define if it is accepted or rejected. The results of the opinion process are final in all cases.

